


<Two Body pin>

Pitch : 0.35mm

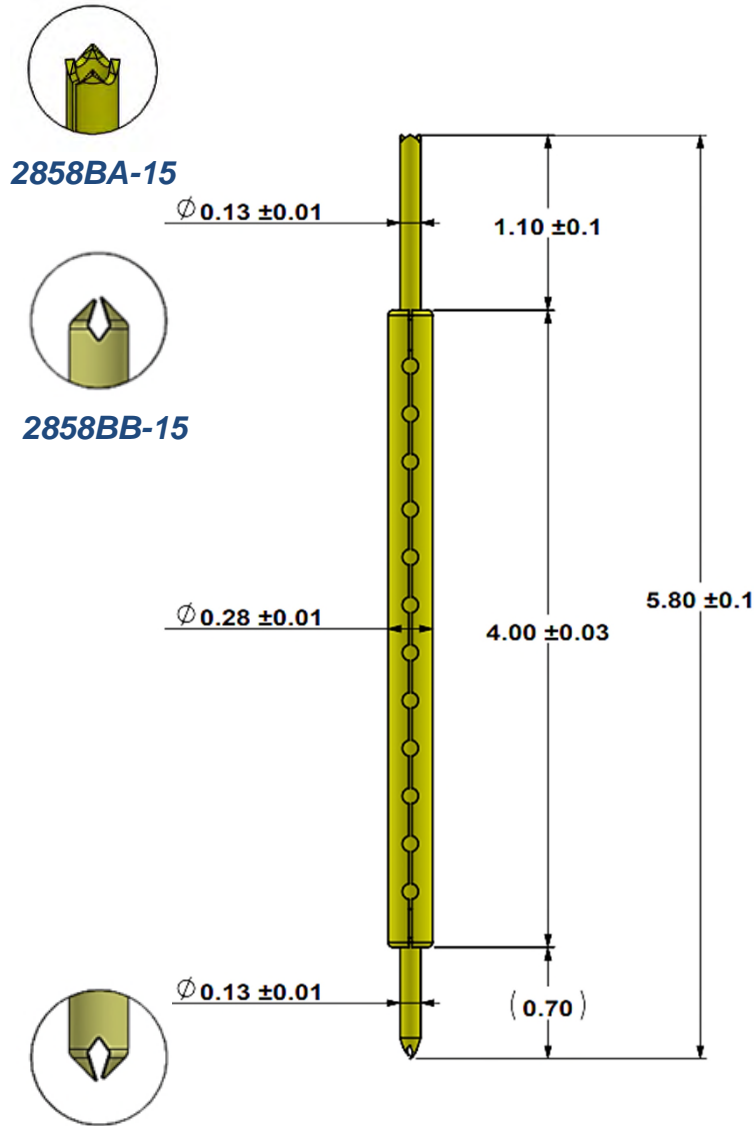

■ Mechanical Specification

- Recommend Stroke : 0.60mm (13gf±20%)
0.70mm (15gf±20%)
- Full Stroke : 0.80mm (16gf±20%)
- Operating Temperature (Unbiased) : -40°C ~ 150°C
- Life Span : >200,000 (Mechanical)

■ Electrical Specification

- Current Rating : 3A continuous
- Resistance : Max 200mΩ

■ Materials and Plating

- Barrel : BeCu (C1720 1/2H) / Au plating
- Spring : BeCu (C1720 1/2H) / Au plating
- Plunger : BeCu (C1720 1/2H) / Au plating

