


<Two Body pin>

Pitch : 0.40mm

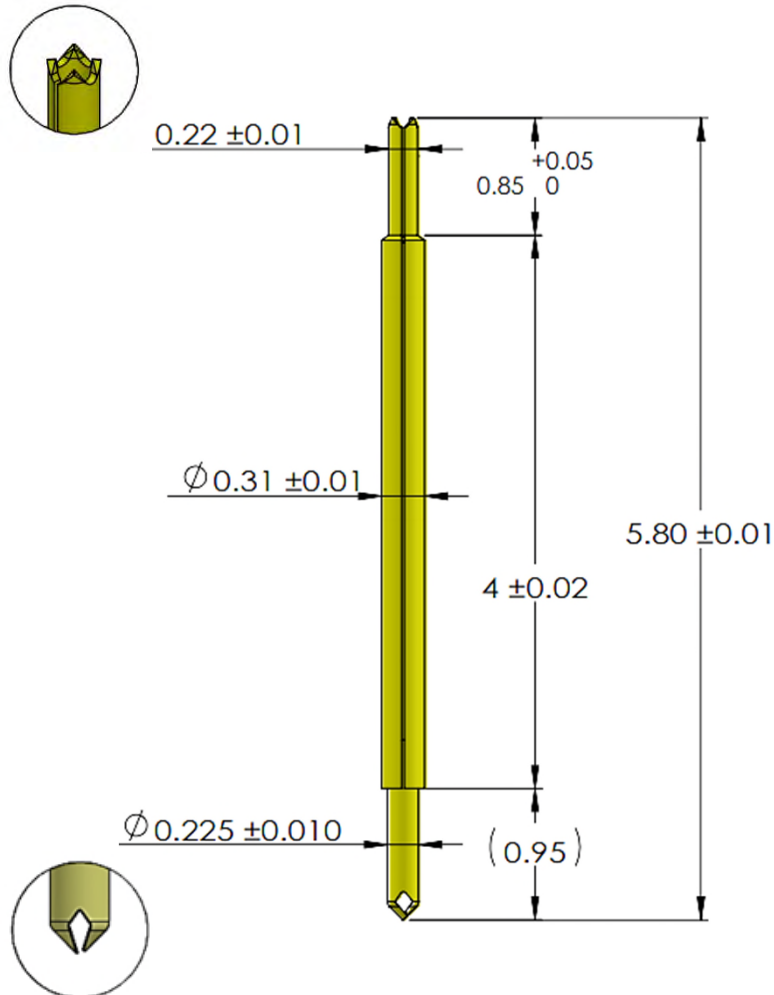

▪ **Mechanical Specification**

- Recommend Stroke : 0.50mm (18gf±20%)
- Full Stroke : 0.60mm (21gf±20%)
- Operating Temperature (Unbiased) : -40°C ~ 150°C
- Life Span : >200,000 (Mechanical)

▪ **Electrical Specification**

- Current Rating : 3A continuous
- Resistance : Max 100mΩ

▪ **Materials and Plating**

- Barrel : BeCu (C1720 1/2H) / Au plating
- Spring : BeCu (C1720 1/2H)
- Plunger : BeCu (C1720 1/2H) / Au plating

