


<Two Body pin>

Pitch : 0.50mm

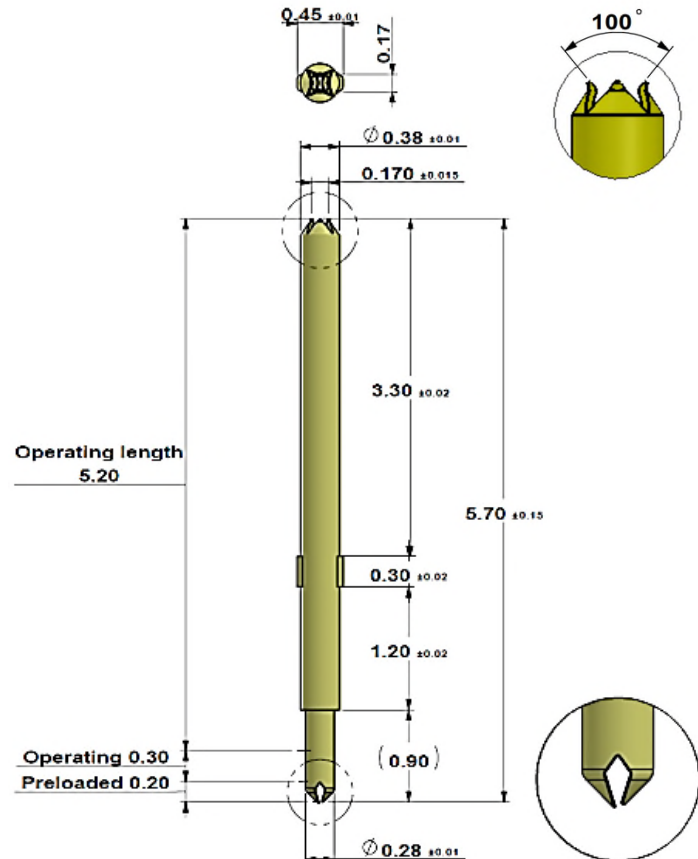

3857AD-25
3857AH-15

3857AI-15

Mechanical Specification


- Recommend Stroke : 0.50mm
- Full Stroke : 0.60mm
- Operating Temperature (Unbiased) : -40°C ~ 150°C
- Life Span : >300,000 (Mechanical)

Electrical Specification

- Current Rating : 3A continuous
- Resistance : Max 100mΩ


Materials and Plating

- Barrel : BeCu (C1720 1/2H) / Au plating
- Spring : BeCu (C1720 1/2H)
- Plunger : BeCu (C1720 1/2H) / Au plating

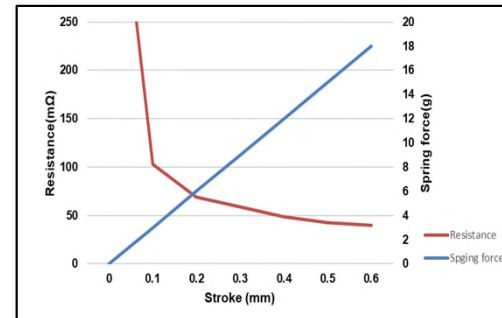

3857AI-15 / 3857AH-15

Recommend Stroke : 0.50mm (15gf±20%)
Full Stroke : 0.60mm (18gf±20%)

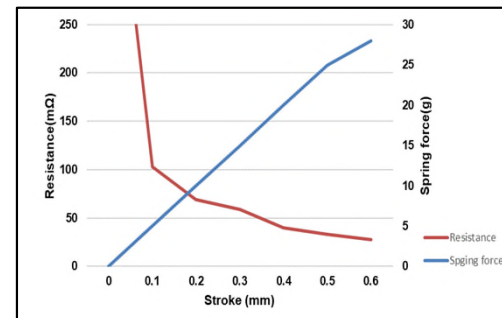

3857AD-25

Recommend Stroke : 0.50mm (25gf±20%)
Full Stroke : 0.60mm (28gf±20%)